




Remote Pressure Monitor - Quick Install Sheet



1 Install service saddle.




2 Install guide plate.





3 Thread corporation valve into service saddle. Valve should be open.




4 Perform drilling operation.




5 Apply joint-sealing tape to threads of pressure sensor.

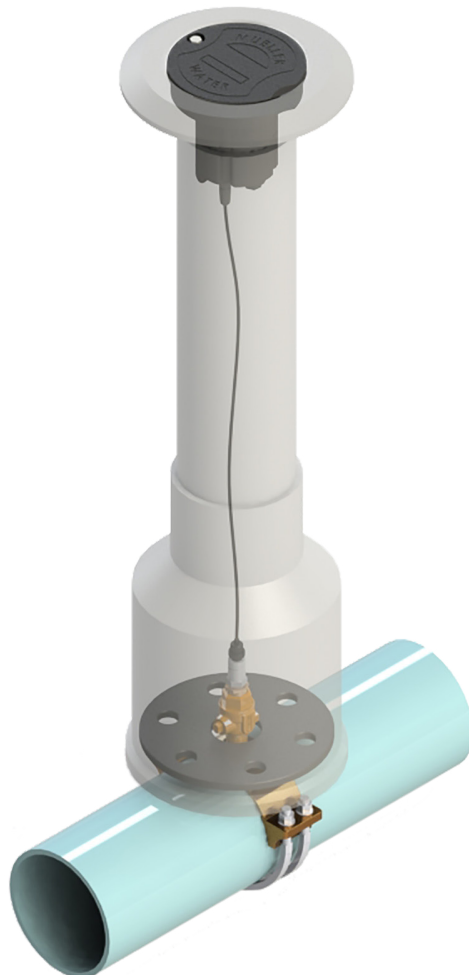

6 Thread pressure sensor into sensor into corporation valve. Open valve.

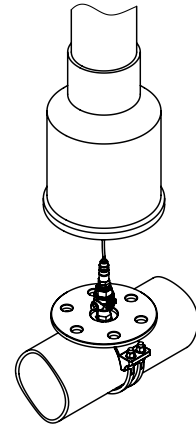

7 Install valve box over the assembly.

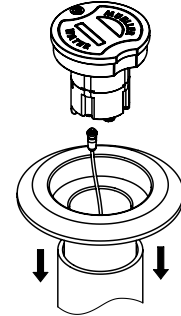

8 Install adjustable top into valve box. Plug sensor cable into RTU and rotate nut 1/4 turn counterclockwise. Insert RTU into adjustable top. Carefully back fill and pace area around valve box per direction by engineer of record.

8 Pressure monitoring begins. Log onto www.miwt.net to view data.



Mueller Co.
633 Chestnut St., Suite 1200
Chattanooga, TN 37450
www.muellercompany.com
intelligentwater@muellercompany.com

IWT Technical Support: 1.844.263.5395
Phone: 1.423.209.4800
Toll Free: 1.800.423.1323
Canada: 1.705.719.9965